QIROX QRH-390-H

6-achsige Robotermechanik mit Hohlwellen-Handgelenk und 3900-mm-Arbeitsraum und hohem Fuß zur Bodenmontage

Der QIROX QRH-390-H ist ein sechsachsiger Knickarmroboter. Der Roboter kommt stehend auf dem Boden zum Einsatz oder ist direkt an einem Roboterpositionierer montiert. Der QIROX QRH-390-H verfügt über ein Hohlwellen-Handgelenk, in dem die Schweißtechnik integriert ist.

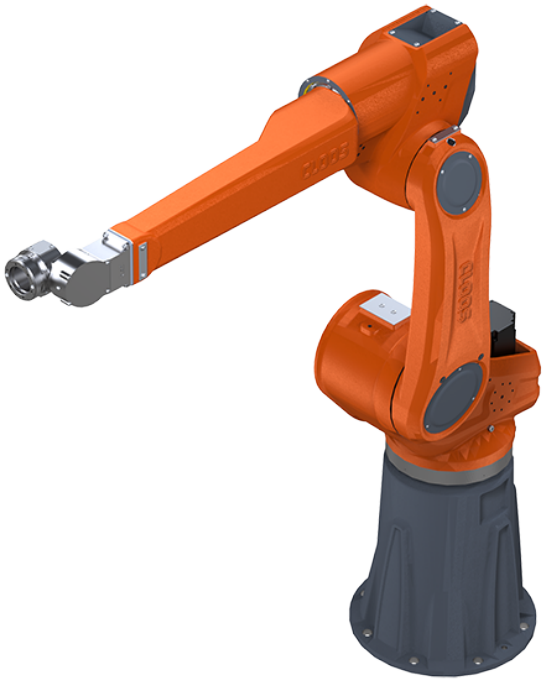

- Flexibilität: Modulare Bauweise für maßgeschneiderte Systeme, optimal abgestimmt auf individuelle Produktionsanforderungen
- Prozesse: Übernimmt alle MIG/MAG-Eindraht-Schweißprozesse
- Schweißspezialist: Im Handgelenk integrierte Hohlwelle sorgt für optimale Drahtführung bei weichen und dünnen Schweißdrähten und erhöht die Standfestigkeit des Brennerschlauchpakets
- Dynamik: Hohe Dynamik durch schlankes Produktdesign, geringes Eigengewicht und ergonomische Formen
- Qualität: Wiederholgenauigkeit, hohe Standzeiten und lange Wartungsintervalle

QIROX QRH-390-H

Technical Data	
Series	WL
Design	Hollow wrist
Number of axes	6
Payload	10 kg
Working area	3900 mm
Mounting area	500x510
Robot weight	225 kg
Mounting	Boden
Processes	MIG/MAG-Schweißen MIG/MAG-Schweißen (WDD)

Process

- MIG/MAG-Schweißen
- MIG/MAG-Schweißen (WDD)

Questions about the product?

Your contact partner
Manuel Benner
Tel.: +49 (0)2773/85-562
Automation@cloos.de

Technical modifications reserved
Version: 19.05.2024